

More
than
switch mode boxes with
wide-range a-c/d-c input
power factor correction and
current-share capacity...

KEPCO
GIVES YOU
ZERO-UP
PROGRAMMABILITY
IN AN
AFFORDABLE
POWER MODULE

Introducing
Kepco's Series RKW
Modular Power Supplies.
Voltage that *you* can control.



ZERO-UP PROGRAMMABILITY IN A POWER MODULE



DIN-RAIL MOUNTABLE

1500W, 600W and 300W RKW Models

RKW PROGRAMMABLE MODEL TABLE

| MODEL | OUTPUT Volts | ADJUSTMENT RANGE | OVP SETTING(1) | OUTPUT CURRENT(2) | CURRENT LIMIT | SHORT CIRCUIT CURRENT | SWITCHING RIPPLE | NOISE | EFFICIENCY (%) TYPICAL | |
|-------------------------|-----------------|---------------------|-------------------|----------------------|------------------|--------------------------|---------------------|-----------|---------------------------|----------|
| | | | Volts | Amps -10 to +50°C | Amps(3) | Amps | mV p-p | mV p-p(4) | 100V a-c | 200V a-c |
| 300 WATT MODELS | | | | | | | | | | |
| RKW 3.3-70K | 3.3 | 1.8-3.6 | 3.96-4.62 | 70 | 73.5-91 | 90 | 80 | 120 | 68 | 72 |
| RKW 5-60K | 5 | 3.5-6.0 | 6.0-7.0 | 60 | 63.0-78.0 | 82 | 80 | 120 | 74 | 78 |
| RKW 12-27K | 12 | 7.2-14.4 | 14.4-16.8 | 27 | 28.4-35.1 | 35 | 120 | 150 | 76 | 80 |
| RKW 15-22K | 15 | 10.5-18.0 | 18.0-21.0 | 22 | 23.1-28.6 | 29 | 120 | 150 | 77 | 81 |
| RKW 24-14K | 24 | 16.8-28.8 | 28.8-33.6 | 14 | 14.7-18.2 | 20 | 150 | 200 | 80 | 84 |
| RKW 28-12K | 28 | 19.6-33.6 | 33.6-38.4 | 12 | 12.6-15.6 | 17 | 150 | 200 | 80 | 84 |
| RKW 48-7K | 48 | 33.6-52.8 | 50.5-58.0 | 7 | 7.4-9.1 | 11 | 200 | 300 | 81 | 85 |
| 600 WATT MODELS | | | | | | | | | | |
| RKW 3.3-150K | 3.3 | 1.8-3.6 | 3.96-4.62 | 150 | 156-186 | 180 | 80 | 120 | 74 | 78 |
| RKW 5-120K | 5 | 3.5-6.0 | 6.0-7.0 | 120 | 126-156 | 160 | 80 | 120 | 76 | 81 |
| RKW 12-53K | 12 | 7.2-14.4 | 14.4-16.8 | 53 | 55.6-68.9 | 65 | 150 | 200 | 80 | 84 |
| RKW 15-43K | 15 | 10.5-18.0 | 18.0-21.0 | 43 | 45.1-55.9 | 55 | 150 | 200 | 81 | 85 |
| RKW 24-27K | 24 | 16.8-28.8 | 28.8-33.6 | 27 | 28.3-35.1 | 35 | 200 | 300 | 82 | 86 |
| RKW 28-23K | 28 | 19.6-33.6 | 33.6-38.4 | 23 | 24.1-29.8 | 29 | 200 | 300 | 82 | 86 |
| RKW 48-13K | 48 | 33.6-52.8 | 52.8-60.0 | 13 | 13.7-16.9 | 19 | 300 | 400 | 84 | 87 |
| 1500 WATT MODELS | | | | | | | | | | |
| RKW 3.3-375K | 3.3 | 1.8-3.6 | 3.96-4.62 | 375 | 390-430 | 430 | 100 | 200 | 73 | 77 |
| RKW 5-300K | 5 | 3.5-6.0 | 6.0-7.0 | 300 | 315-350 | 350 | 100 | 200 | 77 | 82 |
| RKW 12-125K | 12 | 7.2-14.4 | 14.4-16.8 | 125 | 130-140 | 152 | 150 | 200 | 80 | 84 |
| RKW 15-100K | 15 | 10.5-18.0 | 18.0-21.0 | 100 | 105-115 | 135 | 150 | 200 | 82 | 86 |
| RKW 24-65K | 24 | 16.8-28.8 | 28.8-33.6 | 65 | 68-72 | 80 | 200 | 300 | 82 | 86 |
| RKW 28-55K | 28 | 19.6-33.6 | 33.6-38.4 | 55 | 57.7-63.2 | 70 | 200 | 300 | 82 | 86 |
| RKW 48-32K | 48 | 33.6-52.8 | 52.8-60.0 | 32 | 33.6-36.8 | 45 | 300 | 400 | 84 | 88 |

(1) An overvoltage shuts down the output. Recover by resetting the RC terminals. The overvoltage setting tracks the REF voltage.

(2) See Figure 1 for ratings vs. temperature.

(3) The current limit is rectangular. If overcurrent persists for more than 30 seconds, the output shuts down. Reset by resetting the RC terminals.

(4) Bandwidth 100MHz. Ripple and noise will be approximately 1.5 times these values in the operating temperature range -10~0°C.

The ripple and noise values tabulated are valid when the output is derated as shown in Figure 1 from 50~65°C.

Data subject to change without notice. ©2002 KEPCO, INC. Litho in USA

KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11352 USA • Tel: (718) 461-7000 • Fax: (718) 767-1102

Email: hq@kepcopower.com • www.kepcopower.com/rkw.htm

The Programmable-Series RKW are industrial-grade single-output power supplies in the 300, 600 and 1500-watt sizes. They provide d-c outputs from 3.3 volts to 48 volts from a-c mains 85-265V a-c with power factor correction (PFC). They are fully enclosed, fan-cooled power supplies. All models feature overvoltage and overcurrent protection and remote error sensing and feature a remote on-off control, remote voltage trimming and master-slave paralleling with a current balance function. The RKW conform to EN 60950 following the provisions of the Low Voltage Directive 73/23/EEC and 93/68/EEC for the CE mark. Conducted EMI is suppressed to FCC Class B, VCCI Class B, EN 55011-B and EN 55022-B. The 300 and 600 watt models meet the radiated noise limits of FCC Class B and EN 55022 Class B. The RKW 1500 watt models meet the Class A limits for both conducted and radiated EMI, but can be upgraded to Class B with a noise filter, PN 245-0031. Consult factory for details.

PROGRAMMABLE POWER 300-1500 WATTS

The new Kepco RKW Programmable power supplies are more than high-efficiency switch-mode boxes. Beyond their wide-range a-c (or d-c) input, beyond their power factor correction (PFC) to reduce harmonic corruption of the a-c mains, beyond the current-share capacity that allows multi-unit paralleling, the RKW are fully programmable by either external voltage (0-5V) or by resistance.

The output will track the programming signal with remarkable fidelity as the traces below show. Of course, the RKW have large output capacitors so the time constant will depend upon load – and at very light loads or no load, the discharge response will be slow.

Note particularly the linearity of the RKW power supply's response to square and triangular programming inputs. A 0-5V signal programs the output from 0 to maximum output. A 0-5.5V programming signal will control the RKW to 10% over the rated nominal output.



Output voltage from 0V goes to 52.8V (CH2)
Rising Time = 8.50 mS



Output voltage from 52.8V goes to 0V (CH2)
Falling Time = 9.92 mS

RKW PROGRAMMABLE GENERAL SPECIFICATIONS

| SPECIFICATION | | RATING/DESCRIPTION | CONDITION |
|--------------------------|----------------------|---|--|
| Temperature | Operating | -10 to +50°C | See rating curves, figure 1 |
| | Start up | -20 to -10°C | |
| | Storage | -30 to +75°C | |
| Humidity | Operating | 10 to 95% RH | Wet bulb temperature <35°C No condensation |
| | Storage | 10 to 95% RH | |
| Vibration | 5-10Hz | 10mm amplitude | Sweep time 10 min. 1 hr each axis, not operating |
| | 10-200Hz | 2g | |
| Shock | Acceleration | 30g 1/2 sine pulse duration 11 ±5 msec | 3 shocks each axis, not operating |
| Withstand Voltage | Input-Output | a-c 3.0KV 1 min. | Cutout current ⁽¹⁾ |
| | Input-Ground | a-c 2.0KV 1 min. | Cutout current ⁽¹⁾ |
| | Output-Ground | a-c 500V 1 min. | Cutout current ⁽¹⁾ |
| Insulation Resistance | Input-Output | >100MΩ | 500V d-c ⁽²⁾ |
| | Input-Ground | >100MΩ | 500V d-c ⁽²⁾ |
| | Output-Ground | >100MΩ | 500V d-c ⁽²⁾ |
| Safety Standards | UL1950 | UL1950 | Certified by UL |
| | CSA C22.2 No. 950-95 | CSA C22.2 No. 950-95 | |
| | EN 60950 | EN 60950 | Certified by TÜV |

(1) Cutout current: 300 and 600W models = 100mA; 1500W models = 300mA.

(2) Normal temperature (15-35°C) and humidity (10% -85% RH).


RKW FUNCTIONS

| DESCRIPTION | 300W | 600W | 1500W |
|-------------------------|------|------|-----------|
| Overvoltage | yes | yes | yes |
| Overcurrent | yes | yes | yes |
| Thermal Protection | yes | yes | yes |
| PFC | yes | yes | yes |
| Remote On-Off | yes | yes | yes |
| External Voltage Adjust | yes | yes | yes |
| Remote Sense | yes | yes | yes |
| Parallel Operation | yes | yes | yes |
| Master-Slave Operation | yes | yes | yes |
| Series Operation | yes | yes | yes |
| Current Balance | yes | yes | yes |
| Operation Indicator | yes | yes | yes |
| Power Fail Alarm | yes | yes | yes |
| Fan | yes | yes | yes (two) |



RKW Programmable are CE marked per the Low Voltage Directive (LVD), EN 60950.

FIG. 1
OUTPUT POWER VS. AMBIENT TEMPERATURE
300, 600, 1500W Models

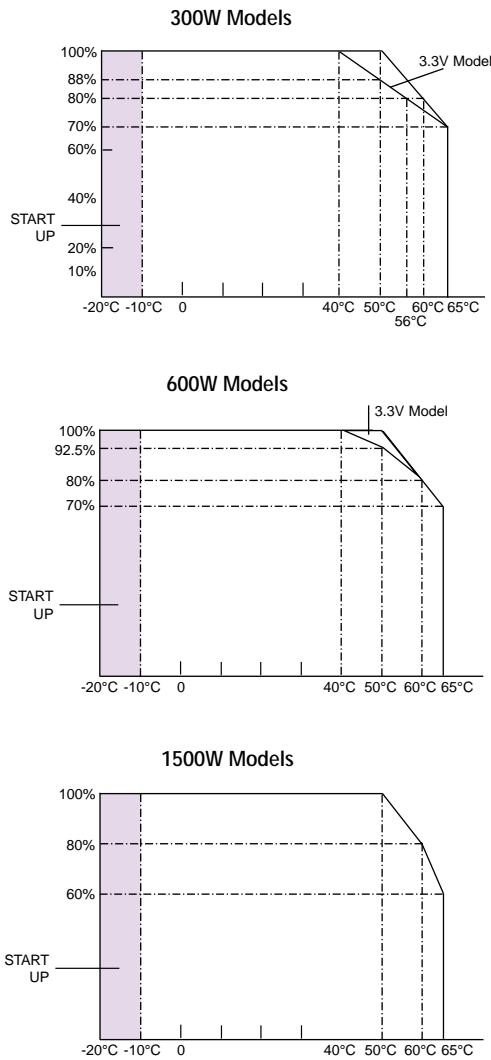

RKW Programmable modules can be individually installed or may be combined into a custom power assembly for multi-output requirements. Please see www.kepcopower.com for details on Kepco's Power Assembly Program.



RKW PROGRAMMABLE COMMON INPUT CHARACTERISTICS

| SPECIFICATIONS | RATING/DESCRIPTION | CONDITION |
|--|---|--|
| Input Voltage Range | 85-265V a-c 110-370V d-c ⁽²⁾ | 0-100% load, -10 to +50°C |
| Input Frequency Range | 47-66Hz | 0-100% load, -10 to +50°C |
| EMI Conducted Noise ⁽¹⁾ | FCC Class B, VCCI-Class B EN 55011-B, EN 55022-B | |
| | FCC Class B, VCCI-Class B EN 55011-B, EN 55022-B | 300-600W models. 1500W models require noise filter: PN 245-0031 |
| Immunity To Electrostatic Discharge (ESD) | EN 61000-4-2 Level 4 | Normal operation |
| Radiated Susceptibility | EN 61000-4-3 Level 3 | Normal operation |
| Electrical Fast Transient | EN 61000-4-4 Level 3 | Normal operation |
| Surge Withstand | EN 61000-4-5 Level 4 | No damage |
| Conducted Susceptibility | EN 61000-4-6 Level 3 | Normal operation |
| Power Freq Mag Field | EN 61000-4-8 Level 4 | Normal operation |
| Voltage Dips, Short Interruptions and Voltage Variations | EN 61000-4-11 | Normal operation |
| Input Harmonics | EN 61000-3-2 | |

(1) The 300 and 600W RKW meet radiated and conducted FCC Class B and EN 55022 Class B limits. The RKW 1500W models meet radiated and conducted FCC Class A and EN 55022 Class A. The radiated and conducted emissions of the 1500W models are reduced to the Class B level by the use of a noise filter, PN 245-0031. Consult factory.
(2) Safety agency approval applies only to a-c input operation.

RKW PROGRAMMABLE MODEL-SPECIFIC INPUT CHARACTERISTICS

| SPECIFICATION | CONDITION | 300W | 600W | 1500W |
|--|------------------------------|--------------|--------------|-----------------------|
| Input Current Amps (5V-48V models) | 100-120V a-c 200-240V a-c | 4.4 2.2 | 8.4 4.2 | 22 11 |
| Input Current Amps (3.3V models) | 100-120V a-c 200-240V a-c | 3.6 1.8 | 7.2 3.6 | 18 9 |
| Surge Current Amps, typ ⁽¹⁾ | 120V a-c 240V a-c | 20 40 | 30 60 | 20 40 |
| Fuse Value Amps | | 10 | 15 | 30 |
| Switching Frequency | | 200KHz | 140KHz | 140KHz ⁽²⁾ |
| Leakage Current typ (mA) | 120V a-c 240V a-c | 0.24 0.31 | 0.45 0.6 | 0.5 1.1 |
| Leakage Current max (mA) | 120V a-c 240V a-c | 0.3 0.38 | 0.75 0.75 | 0.8 1.6 |
| Power Factor | 120V a-c 240V a-c | 0.99 0.99 | 0.99 0.95 | 0.99 0.95 |

(1) First surge only, not including the current flow into the EMI filter.

(2) Model RKW 3-375K: 100KHz.



AN ISO 9001 COMPANY

KEPCO[®]

THE POWER SUPPLIER™
SINCE 1946

RKW PROGRAMMABLE COMMON OUTPUT CHARACTERISTICS

| SPECIFICATIONS | | RATING/DESCRIPTION | CONDITION |
|-----------------------------------|---------------|-----------------------------------|-------------------------------------|
| Source Effect | typ | 0.1% (1) | 85-132 or 170-265V a-c |
| | max | 0.2% (1) | |
| Load Effect | typ | See model specific output ratings | 0-100% load |
| | typ | 0.5% | -10°C to +65°C |
| Temperature Effect | typ | 1.0% | Source, load and temperature |
| | max | ±0.9% (2) | |
| Combined Effect | typ | ±1.8% (2) | Source, load and temperature |
| | max | 0.2% | |
| Time Effect (drift) | typ | 0.5% | 0.5-8 hours |
| | max | 0.2% | |
| Transient Recovery Characteristic | Excursion | ±4% maximum | 50-100% load transient time >50μsec |
| | Recovery | 1 millisecond max | |
| Start Up Time | 100V a-c | See model specific output ratings | |
| Hold Up Time | 100V a-c | See model specific output ratings | |
| Remote Error Sensing | 3.3V models | 0.15V | Voltage compensation per line |
| | 5V models | 0.25V | |
| | 12-48V models | 0.4V | |

(1) 3.3V models: 600 and 1500W: 0.15% typ, 0.3% max; 300W: 5mV typ, 10mV max.

(2) 3.3V models: 600 and 1500W: ±1.1% typ, ±2.2% max.

FEATURES

- Output indicator, green LED.
- Remote on-off logic control.
- Remote error sensing.
- Parallel operation for redundancy or to increase current.
- Current share circuitry to equalize current.
- Remote voltage trimming by resistance.
- Remote voltage trimming by voltage.
- Master-slave operation.
- Power fail logic signal.
- Thermal protection.
- Overvoltage protection.
- Overcurrent protection.
- Power factor corrected, wide-range a-c input.
- DIN-Rail mountable. For information, consult factory.

RKW PROGRAMMABLE MODEL-SPECIFIC OUTPUT CHARACTERISTICS

| SPECIFICATION | CONDITION | 300W | 600W | 1500W |
|------------------------|-----------|---------|---------|---------|
| Load Effect | typ | 0.2% | 0.3% | 0.3% |
| | max | 0.4%(2) | 0.6%(1) | 0.6%(1) |
| Start Up Time typ msec | 100V a-c | 280 | 280 | 280 |
| | 240V a-c | 150 | 100 | 180 |
| Start Up Time max msec | 100V a-c | 350 | 350 | 500 |
| | 240V a-c | 210 | 150 | 400 |
| Hold Up Time typ msec | 100V a-c | 30 | 30 | 35 |
| | 240V a-c | 40 | 40 | 40 |
| Hold Up Time min msec | 100V a-c | 20 | 20 | 20 |
| | 240V a-c | 20 | 20 | 20 |

(1) 3.3V models: 0.45% typ, 0.9% max.

(2) 3.3V models: 10mV typ, 20mV max.

RKW PROGRAMMABLE MECHANICAL SPECIFICATIONS

| SPECIFICATION | 300W | 600W | 1500W |
|--------------------|-----------|---------|----------|
| Dimensions English | Height | 3.62" | 3.62" |
| | Width | 3.15" | 4.72" |
| | Length | 6.89" | 7.87" |
| Dimensions Metric | Height | 92mm | 92mm |
| | Width | 80mm | 120mm |
| | Length | 175mm | 200mm |
| Weight English | 3.96 lb. | 6.6 lb. | 13.2 lb. |
| | 1.8Kg | 3.0Kg | 6.0Kg |
| Cooling | 1 fan | | 2 fans |
| Mounting | 3 surface | | |


For more information,
visit the
Kepco website:
[www.kepcopower.com/
rkw.htm](http://www.kepcopower.com/rkw.htm)




OUTLINE DIMENSIONAL DRAWINGS

Fractional dimensions in light face type are in inches, dimensions in bold face type are in millimeters.


RKW 300W Models

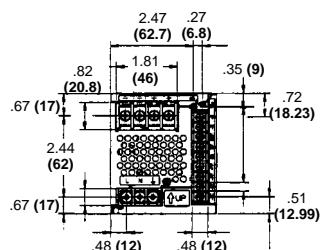


FRONT VIEW

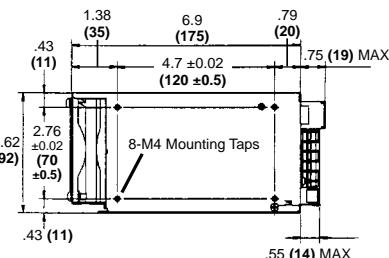

SIDE VIEW

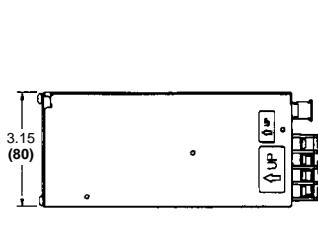


TOP VIEW




REAR VIEW


RKW 600W Models

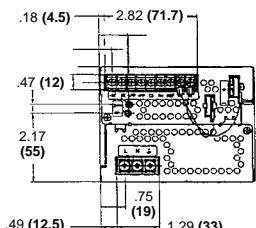


FRONT VIEW

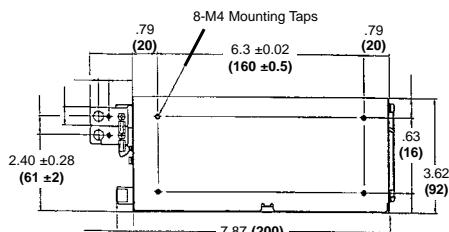

SIDE VIEW

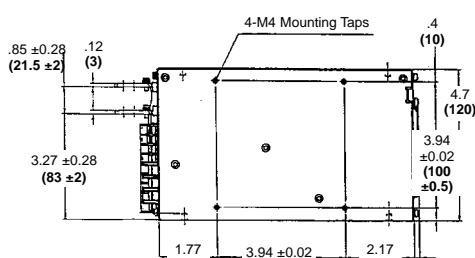


TOP VIEW




REAR VIEW


RKW 1500W Models

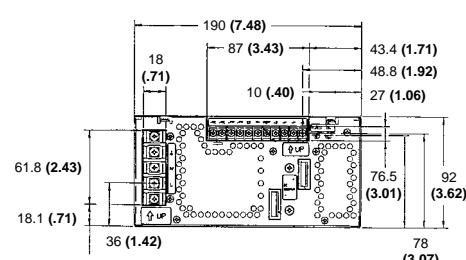


FRONT VIEW

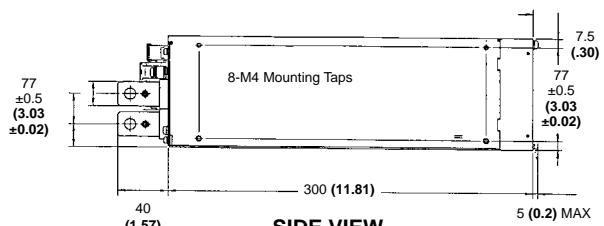

SIDE VIEW

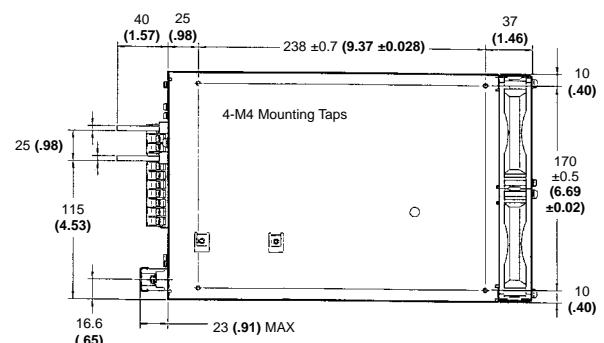

TOP VIEW



REAR VIEW

AN ISO 9001 COMPANY



KEPCO[®]

THE POWER SUPPLIER™
SINCE 1946